



UNDERCUTS AT FIRE RATED DOORS


Door Technical Data

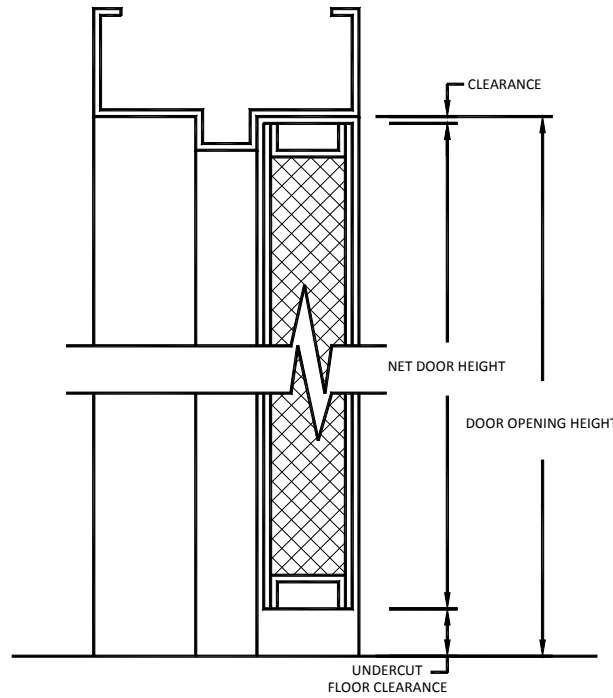

FLOOR WITHOUT SILL

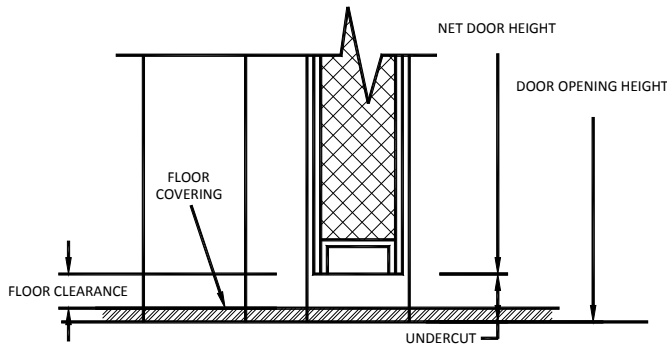

RIGID FLOOR TILES

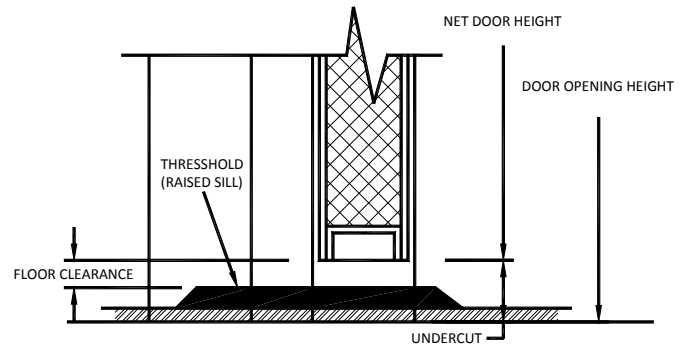

RAISED (NON-COMBUSTIBLE) SILL

Maximum Clearances Allowed in Compliance with NFPA 80:

Clearance Between Bottom of Door and ...	
raised sill *	3/4"
floor without sill	3/4"
rigid floor tiles	3/4"

* Life Safety Code, NFPA 101 limits sill height to 1/2" in a means of egress.

ADA limits sill height to 1/2" at all accessible doors.

Toll Free Phone: 888.MDI.DOOR (888.634.3667)

Phone: 516.294.1801 // Fax: 516.294.1828

www.metropolitandoor.com

