

THE ELIASON® FX-9000R

The Only Choice for Extra Heavy Duty Applications.



FX-9000R IMPACT TRAFFIC DOOR

The Eliason FX-9000R door is ideally suited for applications where heavy forklift traffic is present. The FX-9000R combines a .250" thick rotationally molded LLDPE shell, 1" x 1" tubular steel reinforcements and a Non-CFC urethane core to create one of the toughest, most durable and environmentally friendly doors available. FX-9000R doors operate on the Eliason V-Cam hinging system with ductile iron V-Cam and pillow block and solid cast aluminum upper and lower hinge posts for years of trouble-free service.




Eliason FX-9000R Doors

product features
& specifications



Quality Engineering Proven Over Time

- The FX-9000R features a one-piece rotationally molded LLDPE outer shell combined with heavy duty internal tubular steel reinforcement on both the leading and jamb edges and a Non-CFC urethane foam core to ensure panel strength and integrity.
- The outer surface of the FX-9000R is .250" thick LLDPE polyethylene, making it moisture resistant and one of the toughest doors on the market.
- FX-9000R doors feature a heavy duty V-Cam hinging system with permanently sealed roller bearings for smooth, reliable operation.
- The FX-9000R is available with optional spring assist for high draft applications, aluminum or steel lower hinge guards, 180 degree V-Cam hardware and Easy Spring Bumpers.
- Non-CFC urethane foam core provides an "R" value of 10.83

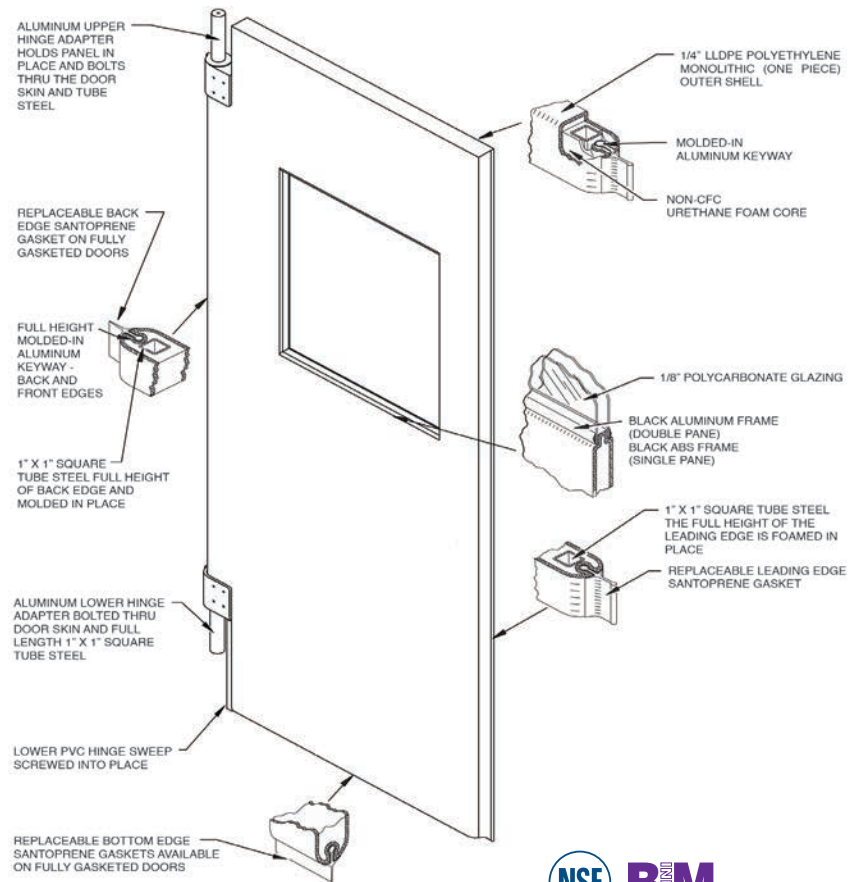

Specifications

DOOR BODY: Overall door panel thickness is 1.875". Rotationally molded LLDPE polyethylene outer surface is .250" thick. The leading and back edges of the door panel are reinforced with internal tubular steel. Non-CFC urethane core is permanently bonded to the outer surface, creating an R-Value of 10.83. Gasket seals are provided on the leading edge, optional full perimeter gaskets are available.

FINISH: .250" thick monolithic rotationally molded LLDPE polyethylene available in 14 colors.

HINGES: Heavy duty upper V-Cam hinging system comes complete with permanently sealed roller bearings. Bottom hinge comes complete with zinc plated ductile iron pillow block, UHMW sleeve and a solid cast aluminum lower hinge adapter. Optional stainless steel V-Cam and pillow block available..

WINDOWS: Impact resistant polycarbonate single pane vision panel is standard, optional double pane is available. Consult factory for sizes available.

OPTIONS: Available with optional Easy Spring Bumpers, aluminum or steel jamb guards, spring assist and 180 degree V-Cam hinges.

Available Colors:

| | | | |
|-----------------|------------|---------------|----------|
| | | Metallic Gray | Black |
| Cloud Gray | Beige | Medium Brown | Burgundy |
| Chocolate Brown | Jade | Forest Green | Red |
| Navy | Royal Blue | Cadet Blue | White |



AUTHORIZED ELIASON DEALER:

Metropolitan Door Industries

350 Thorens Avenue
Garden City Park, NY 11040

Toll Free: 888.MDI.DOOR (888.634.3667)

Phone: 516.294.1801

Fax: 516.294.1828

www.metropolitandoor.com

© MDI and the MDI designed logo are registered trademarks of Metropolitan Door Industries Corp.

© Eliason and the Eliason designed logo are registered trademarks of Eliason Corp.

EcoMate® is a register trademark of Foam Supplies, Inc.