

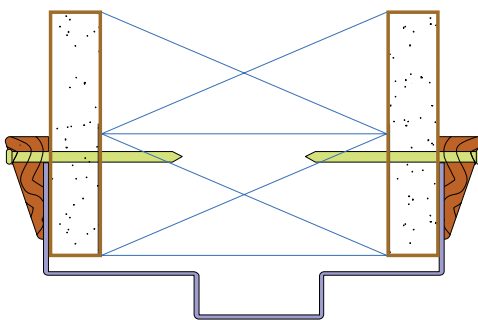
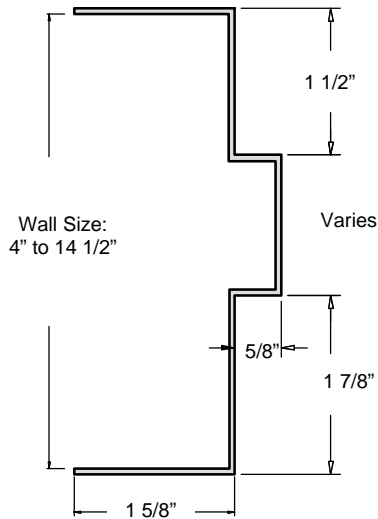


SOF SPECIFICATIONS:

- Manufactured with 16 or 18 gauge A40 Galvanneal steel .
- Available as knock-down only.
- Max. size available for fire rating is up to 4'-0" x 8'-0" single and up to 6'-0" x 7'-0" pairs.
- For use with 1 3/4" (45) door - steel or wood.
- Prepared for 9/32 silencers.
- Prepared with 12 gauge ASA strike reinforcement.
- Prepared with 10 gauge hinge frequency hinge reinforcements.
- Fire rating: up to 1 1/2 hours. Some restrictions do apply.
- Fire labeling: WHI.
- Available for wall sizes from 4" up to 14 1/2" maximum.
- Nail/screw holes factory prepped for installation. Installation nails or screws by others.
- Application: Residential applications: private residences, assisted living, nursing homes; & a variety of light commercial applications.

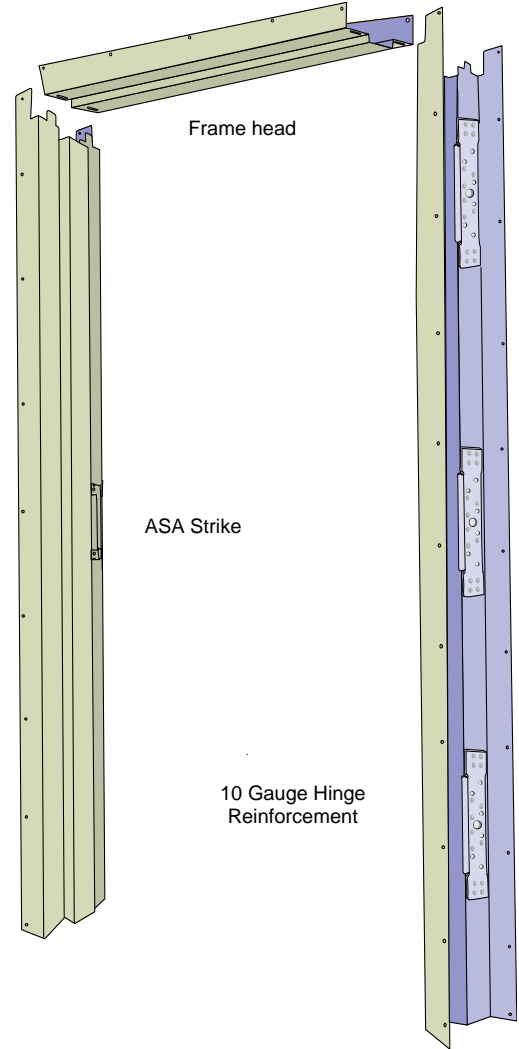

Wood Stud Application

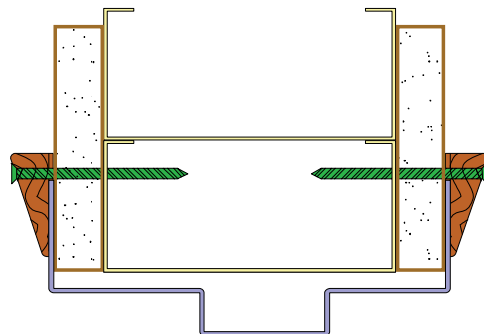

Metal Stud Application