


EDG-GYP

FLUSH ACCESS DOOR WITH CONCEALED PUSH-LATCH AND DRYWALL FLANGE - FOR ALL SURFACE TYPES

INSTALLATION

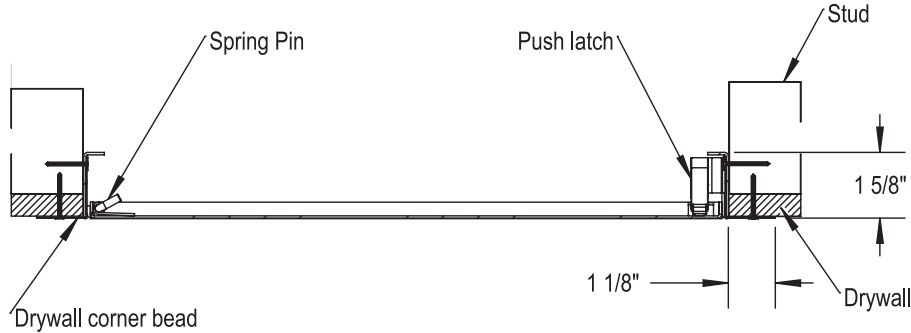


DIMENSION AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

ACCESS DOORS
MADE FAST!

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
6" X 6" (152 x 152)	2	1
8" X 8" (203 x 203)	3	1.4
8" X 12" (203 x 304)	4	1.8
10" X 10" (254 x 254)	4	1.8
* 12" X 12" (304 x 304)	6	2.7
12" X 16" (304 x 406)	7	3.2
12" X 18" (304 x 457)	8	3.6
12" X 24" (304 x 609)	9	4.1
14" X 14" (355 x 355)	7	3.2
16" X 16" (406 x 406)	9	4.1
18" X 18" (457 x 457)	10	4.5
18" X 24" (457 x 609)	13	5.9
20" X 20" (508 x 508)	13	5.9
22" X 22" (558 x 558)	15	6.8
24" X 24" (609 x 609)	17	7.7

* Doors >12" X 12" have 2 push latches.

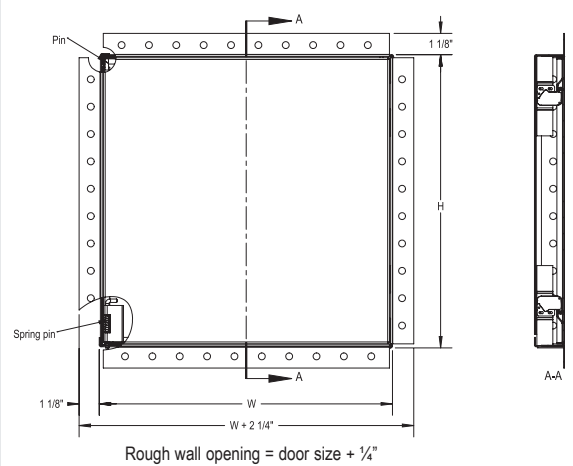

Rough wall opening = door size + 1/4"



DESCRIPTION AND MATERIAL SPECIFICATION

- Material:** 16 gauge cold rolled steel. Frame with corner bead flange.
- Hinge:** Concealed spring hinge.
- Lock / latch:** Concealed push latch.
- Finish:** High quality white powder coat finish.
- Removable door:** Safety cables - For doors > 12" X 12"
- Packaging:** Individually wrapped. 1 per box.

POPULAR OPTIONS:

- Material:** Stainless steel, galvalneal steel
- Lock / Latch:** Screwdriver cam latch, key operated cylinder cam latch, hex head cam latch, pinned hex head cam latch, handle operated cam latch, mortise preparation for cylinder (cylinder optional), ring/tool key operated slam latch.

PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			